



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :

H04Q 11/04

A2

(11) International Publication Number:

WO 98/59523

(43) International Publication Date: 30 December 1998 (30.12.98)

(21) International Application Number: PCT/US98/12740

(22) International Filing Date: 18 June 1998 (18.06.98)

(30) Priority Data:

60/050,338	20 June 1997 (20.06.97)	US
60/050,277	20 June 1997 (20.06.97)	US
08/992,760	17 December 1997 (17.12.97)	US


(71) Applicant: TANTIVY COMMUNICATIONS, INC. [US/US];  
Suite 300, 2200 Front Street, Melbourne, FL 32901 (US).(72) Inventors: GORSUCH, Thomas, E.; 530 Franklin Avenue,  
Indialantic, FL 32903 (US). AMALFITANO, Carlo; 705  
Riverside Drive, Melbourne Beach, FL 32951 (US).(74) Agents: THIBODEAU, David, J., Jr. et al.; Hamilton, Brook,  
Smith & Reynolds, P.C., Two Militia Drive, Lexington, MA  
02173 (AU).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

## Published

Without international search report and to be republished upon receipt of that report.

(54) Title: DYNAMIC BANDWIDTH ALLOCATION TO TRANSMIT A WIRELESS PROTOCOL ACROSS A CODE DIVISION MULTIPLE ACCESS (CDMA) RADIO LINK

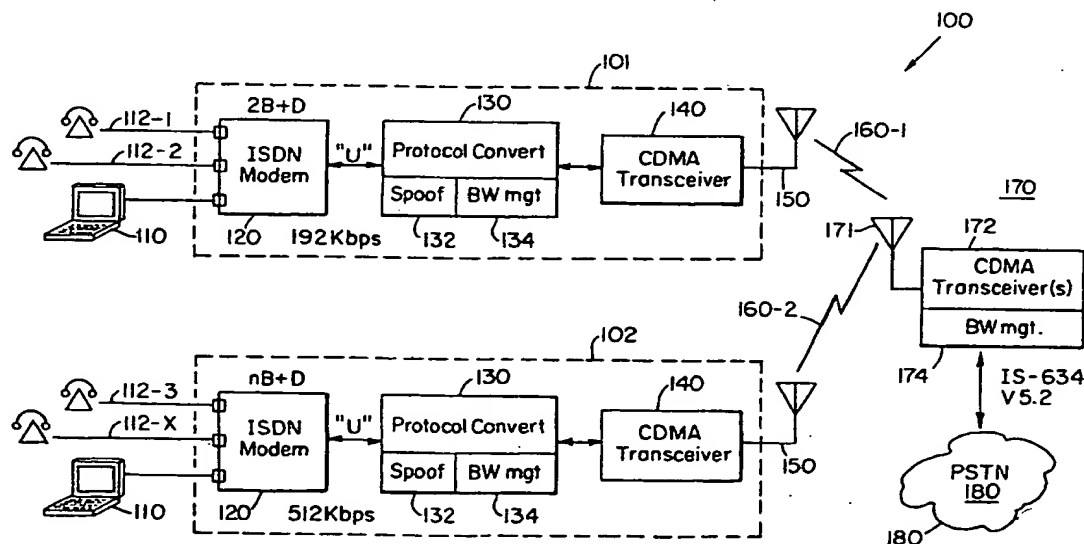

## (57) Abstract

A technique for transmission of wireless signals across CDMA radio links. Bandwidth is allocated dynamically within a session to specific CDMA subscriber unit based upon data rate determinations. Specifically, a dynamic bandwidth allocation algorithm operates from limits calculated based upon available ports per subscriber, expected user bandwidth, and parallel user bandwidth versus throughput. Provisions for priority service, unbalanced forward and reverse spectrum utilization, voice prioritization, and band switching are also made.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DYNAMIC BANDWIDTH ALLOCATION TO TRANSMIT  
A WIRELESS PROTOCOL ACROSS A CODE  
DIVISION MULTIPLE ACCESS (CDMA) RADIO LINK

BACKGROUND OF THE INVENTION

5           The increasing use of wireless telephones and personal computers by the general population has led to a corresponding demand for advanced telecommunication services that were once thought to only be meant for use in specialized applications.

          For example, in the late 1980's, wireless voice communication such as available with cellular telephony had been the exclusive province of the businessman because of  
10       expected high subscriber costs. The same was also true for access to remotely distributed computer networks, whereby until very recently, only business people and large institutions could afford the necessary computers and wireline access equipment.

          However, the general population now increasingly wishes to not only have access to networks such as the Internet and private intranets, but also to access such  
15       networks in a wireless fashion as well. This is particularly of concern for the users of portable computers, laptop computers, hand-held personal digital assistants and the like who would prefer to access such networks without being tethered to a telephone line.

          There still is no widely available satisfactory solution for providing low cost, high speed access to the Internet and other networks using existing wireless networks.  
20       This situation is most likely an artifact of several unfortunate circumstances. For example, the typical manner of providing high speed data service in the business environment over the wireline network is not readily adaptable to the voice grade service available in most homes or offices. In addition, such standard high speed data services do not lend themselves well to efficient transmission over standard cellular  
25       wireless handsets.

          Furthermore, the existing cellular network was originally designed only to deliver voice services. At present, the wireless modulation schemes in use continue

their focus on delivering voice information with maximum data rates only in the range of 9.6 kbps being readily available. This is because the cellular switching network in most countries, including the United States, uses analog voice channels having a bandwidth from about 300 to 3600 Hertz. Such a low frequency channel does not lend  
5 itself directly to transmitting data at rates of 28.8 kilobits per second (kbps) or even the 56.6 kbps that is now commonly available using inexpensive wire line modems, and which rates are now thought to be the minimum acceptable data rates for Internet access.

Switching networks with higher speed building blocks are just now coming into  
10 use in the United States. Although certain wireline networks, called Integrated Services Digital Networks (ISDN), capable of higher speed data access have been known for a number of years, their costs have only been recently reduced to the point where they are attractive to the residential customer, even for wireline service. Although such networks were known at the time that cellular systems were originally deployed, for the  
15 most part, there is no provision for providing ISDN-grade data services over cellular network topologies.

ISDN is an inherently circuit switched protocol, and was, therefore, designed to continuously send bits in order to maintain synchronization from end node to end node to maintain a connection. Unfortunately, in wireless environments, access to channels is  
20 expensive and there is competition for them; the nature of the medium is such that they are expected to be shared. This is dissimilar to the usual wireline ISDN environment in which channels are not intended to be shared by definition.

## SUMMARY OF THE INVENTION

The present invention provides high speed data and voice service over standard  
25 wireless connections via an unique integration of ISDN protocols and existing cellular signaling such as is available with Code Division Multiple Access (CDMA) type

modulated systems. The present invention achieves high data rates through more efficient allocation of access to the CDMA wireless channels. In particular, a number of subchannels are defined within a standard CDMA channel bandwidth, which is normally necessary to support the ISDN protocol, such as by assigning different codes to each subchannel. The instantaneous bandwidth needs of each on-line subscriber unit are met by dynamically allocating multiple subchannels of the RF carrier on an as needed basis for each session. For example, multiple subchannels are granted during times when the subscriber bandwidth requirements are relatively high, such as when downloading Web pages and released during times when the line content is relatively light, such as when the subscriber is reading a Web page which has been previously downloaded or is performing other tasks.

Subchannel assignment algorithms may be implemented to offer various levels of priority service to particular subscribers. These may be assigned based upon available ports per subscriber, expected user bandwidth, service premium payments, and so on.

In accordance with another aspect of the invention, some portion of the available bandwidth is initially allocated to establish a communication session. Once the session has been established, if a subscriber unit has no data to present for transmission, namely, if the data path remains quiescent for some period of time, the previously assigned bandwidth is deallocated. In addition, it is preferable that not all of the previously assigned bandwidth be deallocated, but rather at least some portion be kept available for use by an in-session subscriber. If the inactivity continues for a further period of time, then even the remaining portion of the bandwidth can be deallocated from the session. A logical session connection at a network layer protocol is still maintained even if no subchannels are assigned.

In a preferred arrangement, a single subchannel is maintained for a predetermined minimum idle time for each network layer connection. This assists with more efficient management of channel setup and tear down.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5       The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. FIG. 1 is a block diagram of a wireless communication system making use of a bandwidth management  
10       scheme according to the invention.

FIG. 2 is an Open System Interconnect (OSI) type layered protocol diagram showing where the bandwidth management scheme is implemented in terms of communication protocols.

15       FIG. 3 is a diagram showing how subchannels are assigned within a given radio frequency (RF) channel.

FIG. 4 is a more detailed block diagram of the elements of a subscriber unit.

FIG. 5 is a state diagram of the operations performed by a subscriber unit to request and release subchannels dynamically.

20       FIG. 6 is a block diagram of a portion of a base station unit necessary to service each subscriber unit.

FIG. 7 is a high level structured English description of a process performed by the base station to manage bandwidth dynamically according to the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

Turning attention now to the drawings more particularly, FIG. 1 is a block  
25       diagram of a system 100 for providing high speed data and voice service over a wireless

connection by seamlessly integrating a digital data protocol such as, for example, Integrated Services Digital Network (ISDN) with a digitally modulated wireless service such as Code Division Multiple Access (CDMA).

The system 100 consists of two different types of components, including  
5 subscriber units 101, 102 and base stations 170. Both types of these components 101 and 170 cooperate to provide the functions necessary in order to achieve the desired implementation of the invention. The subscriber unit 101 provides wireless data services to a portable computing device 110 such as a laptop computer, portable computer, personal digital assistant (PDA) or the like. The base station 170 cooperates  
10 with the subscriber unit 101 to permit the transmission of data between the portable computing device 110 and other devices such as those connected to the Public Switched Telephone Network (PSTN) 180.

More particularly, data and/or voice services are also provided by the subscriber unit 101 to the portable computer 110 as well as one or more other devices such as  
15 telephones 112-1, 112-2 (collectively referred to herein as telephones 112. (The telephones 112 themselves may in turn be connected to other modems and computers which are not shown in FIG. 1). In the usual parlance of ISDN, the portable computer 110 and telephones 112 are referred to as terminal equipment (TE). The subscriber unit 101 provides the functions referred to as a network termination type 1 (NT-1). The  
20 illustrated subscriber unit 101 is in particular meant to operate with a so-called basic rate interface (BRI) type ISDN connection that provides two bearer or "B" channels and a single data or "D" channel with the usual designation being 2B+D.

The subscriber unit 101 itself consists of an ISDN modem 120, a device referred to herein as the protocol converter 130 that performs the various functions according to  
25 the invention including spoofing 132 and bandwidth management 134, a CDMA transceiver 140, and subscriber unit antenna 150. The various components of the subscriber unit 101 may be realized in discrete devices or as an integrated unit. For

example, an existing conventional ISDN modem 120 such as is readily available from any number of manufacturers may be used together with existing CDMA transceivers 140. In this case, the unique functions are provided entirely by the protocol converter 130 which may be sold as a separate device. Alternatively, the ISDN modem 120, 5 protocol converter 130, and CDMA transceiver 140 may be integrated as a complete unit and sold as a single subscriber unit device 101.

The ISDN modem 120 converts data and voice signals between the terminal equipment 110 and 112 to format required by the standard ISDN "U" interface. The U interface is a reference point in ISDN systems that designates a point of the connection 10 between the network termination (NT) and the telephone company.

The protocol converter 130 performs spoofing 132 and basic bandwidth management 134 functions, which will be described in greater detail below. In general, spoofing 132 consists of insuring that the subscriber unit 101 appears to the terminal equipment 110, 112 that is connected to the public switched telephone network 180 on 15 the other side of the base station 170 at all times.

The bandwidth management function 134 is responsible for allocating and deallocating CDMA radio channels 160 as required. Bandwidth management also includes the dynamic management of the bandwidth allocated to a given session by dynamically assigning sub-portions of the CDMA channels 160 in a manner which is 20 more fully described below.

The CDMA transceiver 140 accepts the data from the protocol converter 130 and reformats this data in appropriate form for transmission through a subscriber unit antenna 150 over CDMA radio link 160-1. The CDMA transceiver 140 may operate over only a single 1.25 MHZ radio frequency channel or, alternatively, in a preferred 25 embodiment, may be tunable over multiple allocatable radio frequency channels.

CDMA signal transmissions are then received at the base station and processed by the base station equipment 170. The base station equipment 170 typically consists of



multichannel antennas 171, multiple CDMA transceivers 172, and a bandwidth management functionality 174. Bandwidth management controls the allocation of CDMA radio channels 160 and subchannels. The base station 170 then couples the demodulated radio signals to the Public Switch Telephone Network (PSTN) 180 in a manner which is well known in the art. For example, the base station 170 may communicate with the PSTN 180 over any number of different efficient communication protocols such as primary rate ISDN, or other LAPD based protocols such as IS-634 or V5.2.

It should also be understood that data signals travel bidirectionally across the CDMA radio channels 160, i.e., data signals originate at the portable computer 110 are coupled to the PSTN 180, and data signals received from the PSTN 180 are coupled to the portable computer 110.

Other types of subscriber units such as unit 102 may be used to provide higher speed data services. Such subscriber units 102 typically provide a service referred to as nB+D type service that may use a so-called Primary Rate Interface (PRI) type protocol to communicate with the terminal equipment 110, 112. These units provide a higher speed service such as 512 kbps across the U interface. Operation of the protocol converter 130 and CDMA transceiver 140 are similar for the nB+D type subscriber unit 102 as previously described for subscriber unit 101, with the understanding that the number of radio links 160 to support subscriber unit 102 are greater in number or each have a greater bandwidth.

Turning attention now to FIG. 2, the invention may be described in the context of a Open Systems Interconnect multilayer protocol diagram. The three protocol stacks 220, 230, and 240 are for the ISDN modem 120, protocol converter 130, and base station 170, respectively.

The protocol stack 220 used by the ISDN modem 120 is conventional for ISDN communications and includes, on the terminal equipment side, the analog to digital

conversion (and digital to analog conversion) 221 and digital data formatting 222 at layer one, and an applications layer 223 at layer two. On the U interface side, the protocol functions include Basic Rate Interface (BRI) such as according to standard 1.430 at layer one, a LAPD protocol stack at layer two, such as specified by standard  
5 Q.921, and higher level network layer protocols such as Q.931 or X.227 and high level end to end signaling 228 required to establish network level sessions between nodes.

The lower layers of the protocol stack 220 aggregate two bearer (B) channels to achieve a single 128 kilobits per second (kbps) data rate in a manner which is well known in the art. Similar functionality can be provided in a primary rate interface, such  
10 as used by subscriber unit 102, to aggregate multiple B channels to achieve up to 512 kbps data rate over the U interface.

The protocol stack 230 associated with the protocol converter 130 consists of a layer one basic rate interface 231 and a layer two LAPD interface 232 on the U interface side, to match the corresponding layers of the ISDN modem stack 220.

15 At the next higher layer, usually referred to as the network layer, a bandwidth management functionality 235 spans both the U interface side and the CDMA radio link side of the protocol converter stack 230. On the CDMA radio link side 160, the protocol depends upon the type of CDMA radio communication in use. An efficient wireless protocol referred to herein as EW[x] 234, encapsulates the layer one 231 and  
20 layer two 232 ISDN protocol stacks in such a manner that the terminal equipment 110 may be disconnected from one or more CDMA radio channels without interrupting a higher network layer session.

The base station 170 contains the matching CDMA 241 and EW[x] 242 protocols as well as bandwidth management 243. On the PSTN side, the protocols may  
25 convert back to basic rate interface 244 and LAPD 245 or may also include higher level network layer protocols as Q.931 or V5.2 246.

Call processing functionality 247 allows the network layer to set up and tear down channels and provide other processing required to support end to end session connections between nodes as is known in the art.

The spoofing function 132 performed by the EW[x] protocol 234 includes the  
5 necessary functions to keep the U interface for the ISDN connection properly maintained, even in the absence of a CDMA radio link 160 being available. This is necessary because ISDN, being a protocol originally developed for wire line connections; expects to send a continuous stream of synchronous data bits regardless of whether the terminal equipment at either end actually has any data to transmit. Without  
10 the spoofing function 132, radio links 160 of sufficient bandwidth to support at least a 192 kbps data rate would be required throughout the duration of an end to end network layer session, whether or not data is actually presented.

EW[x] 234 therefore involves having the CDMA transceiver 140 loop back these synchronous data bits over the ISDN communication path to spoof the terminal  
15 equipment 110, 112 into believing that a sufficiently wide wireless communication link 160 is continuously available. However, only when there is actually data present from the terminal equipment to the wireless transceiver 140 is wireless bandwidth allocated. Therefore, unlike the prior art, the network layer need not allocate the assigned wireless bandwidth for the entirety of the communications session. That is, when data is not  
20 being presented upon the terminal equipment to the network equipment, the bandwidth management function 235 deallocates initially assigned radio channel bandwidth 160 and makes it available for another transceiver and another subscriber unit 101.

In order to better understand how bandwidth management 235 and 243 accomplish the dynamic allocation of radio bandwidth, turn attention now to FIG.3.  
25 This figure illustrates one possible frequency plan for the wireless links 160 according to the invention. In particular, a typical transceiver 170 can be tuned on command to any 1.25 MHZ channel within a much larger bandwidth, such as up to 30 MHZ. In the

case of location in an existing cellular radio frequency bands, these bandwidths are typically made available in the range of from 800 to 900 MHZ. For personal communication systems (PCS) type wireless systems, the bandwidth is typically allocated in the range from about 1.8 to 2.0 GigaHertz (GHz). In addition, there are  
5 typically two matching bands active simultaneously, separated by a guard band, such as 80 MHZ; the two matching bands form forward and reverse full duplex link.

Each of the CDMA transceivers, such as transceiver 140 in the subscriber unit 101 and transceivers 172 in the base station 170, are capable of being tuned at any given point in time to a given 1.25 MHZ radio frequency channel. It is generally understood  
10 that such 1.25 MHZ radio frequency carrier provides, at best, a total equivalent of about 500 to 600 kbps maximum data rate transmission within acceptable bit error rate limitations.

In the prior art, it was thus generally understood that in order to support an ISDN type like connection which may contain information at a rate of 128 kbps that, at best,  
15 only about (500 kbps/128 kbps) or only 3 ISDN subscriber units could be supported at best.

In contrast to this, the present invention subdivides the available approximately 500 to 600 kbps bandwidth into a relatively large number of subchannels. In the illustrated example, the bandwidth is divided into 64 subchannels 300, each providing  
20 an 8 kbps data rate. A given subchannel 300 is physically implemented by encoding a transmission with one of a number of different assignable pseudorandom codes. For example, the 64 subchannels 300 may be defined within a single CDMA RF carrier by using a different orthogonal Walsh codes for each defined subchannel 300.

The basic idea behind the invention is to allocate the subchannels 300 only as  
25 needed. For example, multiple subchannels 300 are granted during times when a particular ISDN subscriber unit 101 is requesting that large amounts of data be

transferred. These subchannels 300 are released during times when the subscriber unit 101 is relatively lightly loaded.

Before discussing how the subchannels are preferably allocated and deallocated, it will help to understand a typical subscriber unit 101 in greater detail. Turning

5 attention now to FIG. 4, it can be seen that an exemplary protocol converter 130 consists of a microcontroller 410, reverse link processing 420, and forward link processing 430. The reverse link processing 420 further includes ISDN reverse spoofer 422, voice data detector 423, voice decoder 424, data handler 426, and channel multiplexer 428. The forward link processing 430 contains analogous functions operating in the reverse  
10 direction, including a channel multiplexer 438, voice data detector 433, voice decoder 434, data handler 436, and ISDN forward spoofer 432.

In operation, the reverse link 420 first accepts channel data from the ISDN modem 120 over the U interface and forwards it to the ISDN reverse spoofer 432. Any repeating, redundant "echo" bits are removed from data received and, once extracted,  
15 sent to the forward spoofer 432. The remaining layer three and higher level bits are thus information that needs to be send over a wireless link.

This extracted data is sent to the voice decoder 424 or data handler 426, depending upon the type of data being processed.

Any D channel data from the ISDN modem 120 is sent directly to voice data  
20 detection 423 for insertion on the D channel inputs to the channel multiplexer 428. The voice data detection circuit 423 determines the content of the D channels by analyzing commands received on the D channel.

D channel commands may also be interpreted to control a class of wireless services provided. For example, the controller 410 may store a customer parameter  
25 table that contains information about the customers desired class of service which may include parameters such as maximum data rate and the like. Appropriate commands are thus sent to the channel multiplexer 428 to request one or more required subchannels

300 over the radio links 160 for communication. Then, depending upon whether the information is voice or data, either the voice decoder 424 or data handler 426 begins feeding data inputs to the channel multiplexer 428.

The channel multiplexer 428 may make further use of control signals provided  
5 by the voice data detection circuits 423, depending upon whether the information is voice or data.

In addition, the CPU controller 410, operating in connection with the channel multiplexer 428, assists in providing the necessary implementation of the EW[x] protocol 234 between the subscriber unit 101 and the base station 170. For example,  
10 subchannel requests, channel setup, and channel tear down commands are sent via commands placed on the wireless control channel 440. These commands are intercepted by the equivalent functionality in the base station 170 to cause the proper allocation of subchannels 300 to particular network layer sessions.

The data handler 426 provides an estimate of the data rate required to the CPU  
15 controller 410 so that appropriate commands can be sent over the control channel 440 to allocate an appropriate number of subchannels. The data handler 426 may also perform packet assembly and buffering of the layer three data into the appropriate format for transmission.

The forward link 430 operates in analogous fashion. In particular, signals are  
20 first received from the channels 160 by the channel multiplexer 438. In response to receiving information on the control channels 440, control information is routed to the voice data detection circuit 433. Upon a determination that the received information contains data, the received bits are routed to the data handler 436. Alternatively, the information is voice information, and routed to the voice decoder 434.

25 Voice and data information are then sent to the ISDN forward spoofer 432 for construction into proper ISDN protocol format. This assembly of information is

coordinated with the receipt of echo bits from the ISDN reverse spoofer 422 to maintain the proper expected synchronization on the U interface with the ISDN modem 120.

It can now be seen how a network layer communication session may be maintained even though wireless bandwidth initially allocated for transmission is  
5 reassigned to other uses when there is no information to transmit. In particular, the reverse 422 and forward 432 spoofers cooperate to loop back non-information bearing signals, such as flag patterns, sync bits, and other necessary information, so as to spoof the data terminal equipment connected to the ISDN modem 120 into continuing to operate as though the allocated wireless path over the CDMA transceiver 150 is  
10 continuously available.

Therefore, unless there is an actual need to transmit information from the terminal equipment being presented to the channel multiplexers 428, or actual information being received from the channel multiplexers 438, the invention may deallocate initially assigned subchannel 300, thus making them available for another  
15 subscriber unit 101 of the wireless system 100.

The CPU controller 410 may also perform additional functions to implement the EW[x] protocol 234, including error correction, packet buffering, and bit error rate measurement.

The functions necessary to implement bandwidth management 235 in the  
20 subscriber unit 101 are carried out in connection with the EW[x] protocol typically by the CPU controller 410 operating in cooperation with the channel multiplexers 428, 438, and data handlers 420, 436. In general, bandwidth assignments are made for each network layer session based upon measured short term data rate needs. One or more subchannels 300 are then assigned based upon these measurements and other parameters  
25 such as amount of data in queue or priority of service as assigned by the service provider. In addition, when a given session is idle, a connection is preferably still maintained end to end, although with a minimum number of, such as a single

subchannel being assigned. For example, this single subchannel may eventually be dropped after a predetermined minimum idle time is observed.

FIG. 5 is a detailed view of the process by which a subscriber unit 101 may request subchannel 300 allocations from the base station 170 according to the invention.

- 5 In a first state 502, the process is in an idle state. At some point, data becomes ready to transmit and state 504 is entered, where the fact that data is ready to be transmitted may be detected by an input data buffer in the data handler 426 indicated that there is data ready.

- 10 In state 504, a request is made, such as via a control channel 440 for the allocation of a subchannel to subscriber unit 101. If a subchannel is not immediately available, a pacing state 506 may be entered in which the subscriber unit simply waits and queues its request for a subchannel to be assigned.

- 15 Eventually, a subchannel 300 is granted by the base station and the process continues to state 508. In this state, data transfer may then begin using the single assigned subchannel. The process will continue in this state as long as the single subchannel 300 is sufficient for maintaining the required data transfer and/or is being utilized. However, if the input buffer should become empty, such as notified by the data handler 426, then the process will proceed to a state 510. In this state 510, the subchannel will remain assigned in the event that data traffic again resumes. In this case, such as when the input buffer begins to once again become full and data is again ready to transmit, then the process returns to state 508. However, from state 510 should a low traffic timer expire, then the process proceeds to state 512 in which the single subchannel 300 is released. The process then returns to the idle state 502. In state 512, if a queue request is pending from states 506 or 516, the subchannel is used to satisfy such request instead of releasing it.

Returning to state 508, if instead the contents of the input buffer are beginning to fill at a rate which exceeds a predetermined threshold indicating that the single



subchannel 300 is insufficient to maintain the necessary data flow, then a state 514 is entered in which more subchannels 300 are requested. A subchannel request message is again sent over the control channel 440 or through a subchannel 300 already allocated. If additional subchannels 300 are not immediately available, then a pacing state 516  
5 may be entered and the request may be retried by returning to state 514 and 516 as required. Eventually, an additional subchannel will be granted and processing can return to state 508.

With the additional subchannels being now available, the processing continues to state 518 where data transfer may be made on a multiple N of the subchannels. This  
10 may be done at the same time through a channel bonding function or other mechanism for allocating the incoming data among the N subchannels. As the input buffer contents reduced below an empty threshold, then a waiting state 520 may be entered.

If, however, a buffer filling rate is exceeded, then state 514 may be entered in which more subchannels 300 are again requested.

15 In state 520, if a high traffic timer has expired, then one or more of the additional subchannels are released in state 522 and the process returns to state 508.

FIG. 6 is a block diagram of the components of the base station equipment 170 of the system 100. These components perform analogous functions to those as already described in detail in FIG. 4 for the subscriber unit 101. It should be understood that a  
20 forward link 620 and reverse link 630 are required for each subscriber unit 101 or 102 needing to be supported by the base station 170.

The base station forward link 620 functions analogously to the reverse link 420 in the subscriber unit 100, including a subchannel inverse multiplexer 622, voice data detection 623, voice decoder 624, data handler 626, and ISDN spoofer 622, with the  
25 understanding that the data is traveling in the opposite direction in the base station 170. Similarly, the base station reverse link 630 includes components analogous to those in the subscriber forward link 430, including an ISDN spoofer 632, voice data detection

633, voice decoder 634, data handler 636, and subchannel multiplexer 638. The base station 170 also requires a CPU controller 610.

One difference between the operation of the base station 170 and the subscriber unit 101 is in the implementation of the bandwidth management functionality 243. This  
5 may be implemented in the CPU controller 610 or in another process in the base station 170.

A high level description of a software process performed by dynamic channel allocation portion 650 of the bandwidth management 243 is contained in FIG. 7. This process includes a main program 710, which is continuously executed, and includes  
10 processing port requests, processing bandwidth release, and processing bandwidth requests, and then locating and tearing down unused subchannels.

The processing of port requests is more particularly detailed in a code module 720. These include upon receiving a port request, and reserving a subchannel for the new connection, preferably chosen from the least utilized section of the radio frequency  
15 bandwidth. Once the reservation is made, an RF channel frequency and code assignment are returned to the subscriber unit 101 and a table of subchannel allocations is updated. Otherwise, if subchannels are not available, then the port request is added to a queue of port requests. An expected waiting time may be estimated upon the number of pending port requests and priorities, and an appropriate wait message can be returned  
20 to the requesting subscriber unit 101.

In a bandwidth release module 730, the channel bonding function executing in the multiplexer 622 in the forward link is notified of the need to release a subchannel. The frequency and code are then returned to an available pool of subchannels and a radio record is updated.

25 The following bandwidth request module 740 may include selecting the request having the highest priority with lowest bandwidth utilization. Next, a list of available subchannels is analyzed for determining the greatest available number. Finally,

subchannels are assigned based upon need, priority, and availability. A channel bandwidth bonding function is notified within the subchannel multiplexer 622 and the radio record which maintains which subchannels are assigned to which connections is updated.

5           In the bandwidth on demand algorithm, probability theory may typically be employed to manage the number of connections or available ports, and the spectrum needed to maintain expected throughput size and frequency of subchannel assignments. There may also be provisions for priority service based upon subscribers who have paid a premium for their service.

10           It should be understood, for example, that in the case of a supporting 128 kbps ISDN subscriber unit 101 that even more than 16 x 8 kbps subchannels may be allocated at a given time. In particular, one may allow a larger number, such as 20 subchannels, to be allocated to compensate for delay and reaction in assigning subchannels. This also permits dealing with bursts of data in a more efficient fashion such as typically  
15 experienced during the downloading of Web pages.

          In addition, voice traffic may be prioritized as against data traffic. For example, if a voice call is detected, at least one subchannel 300 may be active at all times and allocated exclusively to the voice transfer. In that way, voice calls blocking probability will be minimized.

## 20   EQUIVALENTS

          While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

25           For example, instead of ISDN, other wireline digital protocols may be encapsulated by the EW[x] protocol, such as xDSL, Ethernet, and X.25, and therefore

may advantageously use the dynamic wireless subchannel assignment scheme described herein.

Those skilled in the art will recognize or be able to ascertain using no more than routine experimentation, many equivalents to the specific embodiments of the invention  
5 described specifically herein. Such equivalents are intended to be encompassed in the scope of the claims.

## CLAIMS

What is claimed is:

1. A method for providing wireless communication of digital signals, the digital signals being communicated between a plurality of wireless subscriber units and a base station, the digital signals being communicated using at least one radio frequency channel via Code Division Multiple Access (CDMA) modulated radio signals, the digital signals also having a given nominal data rate, the method comprising the steps of:
  - a) making available a plurality of subchannels within each CDMA radio channel, wherein a data rate of each subchannel is much less than the nominal data rate of the digital signals;
  - b) establishing a network layer session between terminal equipment connected to the subscriber unit through the base station to other terminal equipment connected to the base station; and
  - c) during the network layer session, allocating available subchannels only on an as-needed basis, with the number of subchannels allocated thereby changing during the duration of a given session.
2. A method as in Claim 1 wherein a plurality of subchannels are made available on a single radio frequency carrier by assigning orthogonal codes for each subchannel.
3. A method as in Claim 1 wherein step b) additionally comprises:
  - i) upon establishing a network layer session, initially allocating a single subchannel; and

-20-

- ii) as a session requires additional bandwidth to maintain transmission of the digital signals, allocating additional subchannels.

4. A method as in Claim 1 wherein the digital signals include a digitized  
5 representation of a voice signal, additionally comprising the step of:  
maintaining allocation of subchannels sufficient to service bandwidth  
requirements of the voice signal for the duration of the session  
connection.
5. A method as in Claim 1 wherein the digital signals include a digitized  
10 representation of a voice signal, additionally comprising the step of:  
selecting a subchannel bandwidth to be sufficient to transmit the voice  
signal bandwidth continuously.
6. A method as in Claim 1 wherein step c) additionally comprises:  
when no digital signals are present during the session connection,  
15 deallocating subchannels while maintaining the session connection at the  
network layer and while spoofing lower physical layers at the subscriber  
unit into behaving as if sufficient bandwidth is available to continuously  
transmit digital signals.
7. A method as in Claim 1 wherein subchannels are allocated on a priority class of  
20 service basis among a number of subscriber units.
8. A method as in Claim 1 wherein the digital signals are of different nominal  
bandwidths.

9. A method of communicating digital data over a wireless physical medium, the digital data packets provided by an integrated services digital network (ISDN) modem at least at a base rate interface (BRI) data rate as received from terminal equipment, the wireless physical medium using code division multiple access (CDMA) radio frequency channel digital encoding, the method comprising the steps of:

- a) assigning multiple orthogonal codes to each CDMA channel to thereby provide multiple subchannels, each subchannel supporting only a data rate which is much less than the BRI data rate supported by the ISDN modem;
- b) buffering data received from the ISDN modem until there are a minimum number of data elements needing transmission;
- c) requesting at least one subchannel allocation over the wireless physical medium for the ISDN modem;
- d) transmitting data using the allocated subchannels;
- e) upon a number of buffered data elements exceeding a predetermined maximum threshold amount, requesting additional subchannels to be allocated to communications from the ISDN modem; and
- f) upon a number of buffered data elements following below a predetermined minimum threshold amount, releasing subchannels from allocation to the ISDN modem.

10. For use with a cellular digital communication network having a base station and a plurality of subscriber units served thereby, said cellular digital communications network including a control channel by way of which digital signal transmission channels are assignable for communication sessions for said

subscriber units, a method of allocating bandwidth to said subscriber units for said digital signal transmission channels comprising the steps of:

- a) in response to a subscriber unit's request for a digital signal transmission channel, allocating a portion of said available bandwidth for use by said subscriber unit for said digital signal transmission channel during a communication session; and
- b) in the absence of a presentation of digital communication signals by said subscriber unit for a prescribed period of time during said communication session, deallocating said portion of said available bandwidth from use by said subscriber unit.

11. For use with a cellular digital communication network having a base station and a plurality of subscriber units served thereby, said cellular digital communications network including a control channel by way of which digital signal transmission channels are assignable for communication sessions for said subscriber units, a method of allocating bandwidth to said subscriber units for said digital signal transmission channels comprising the steps of:

- a) in response to a subscriber unit's need to transmit digital communication signals, allocating a portion of said available bandwidth that is selected to the extent possible for meeting said subscriber unit's need, for use by said subscriber unit during a communication session; and
- b) in the absence of a presentation of digital communication signals by said subscriber unit for a prescribed period of time during said communication session, deallocating a prescribed portion of said selected portion of said available bandwidth from said subscriber unit and, instead making said prescribed portion of said selected portion of said available bandwidth available for use by another subscriber unit.



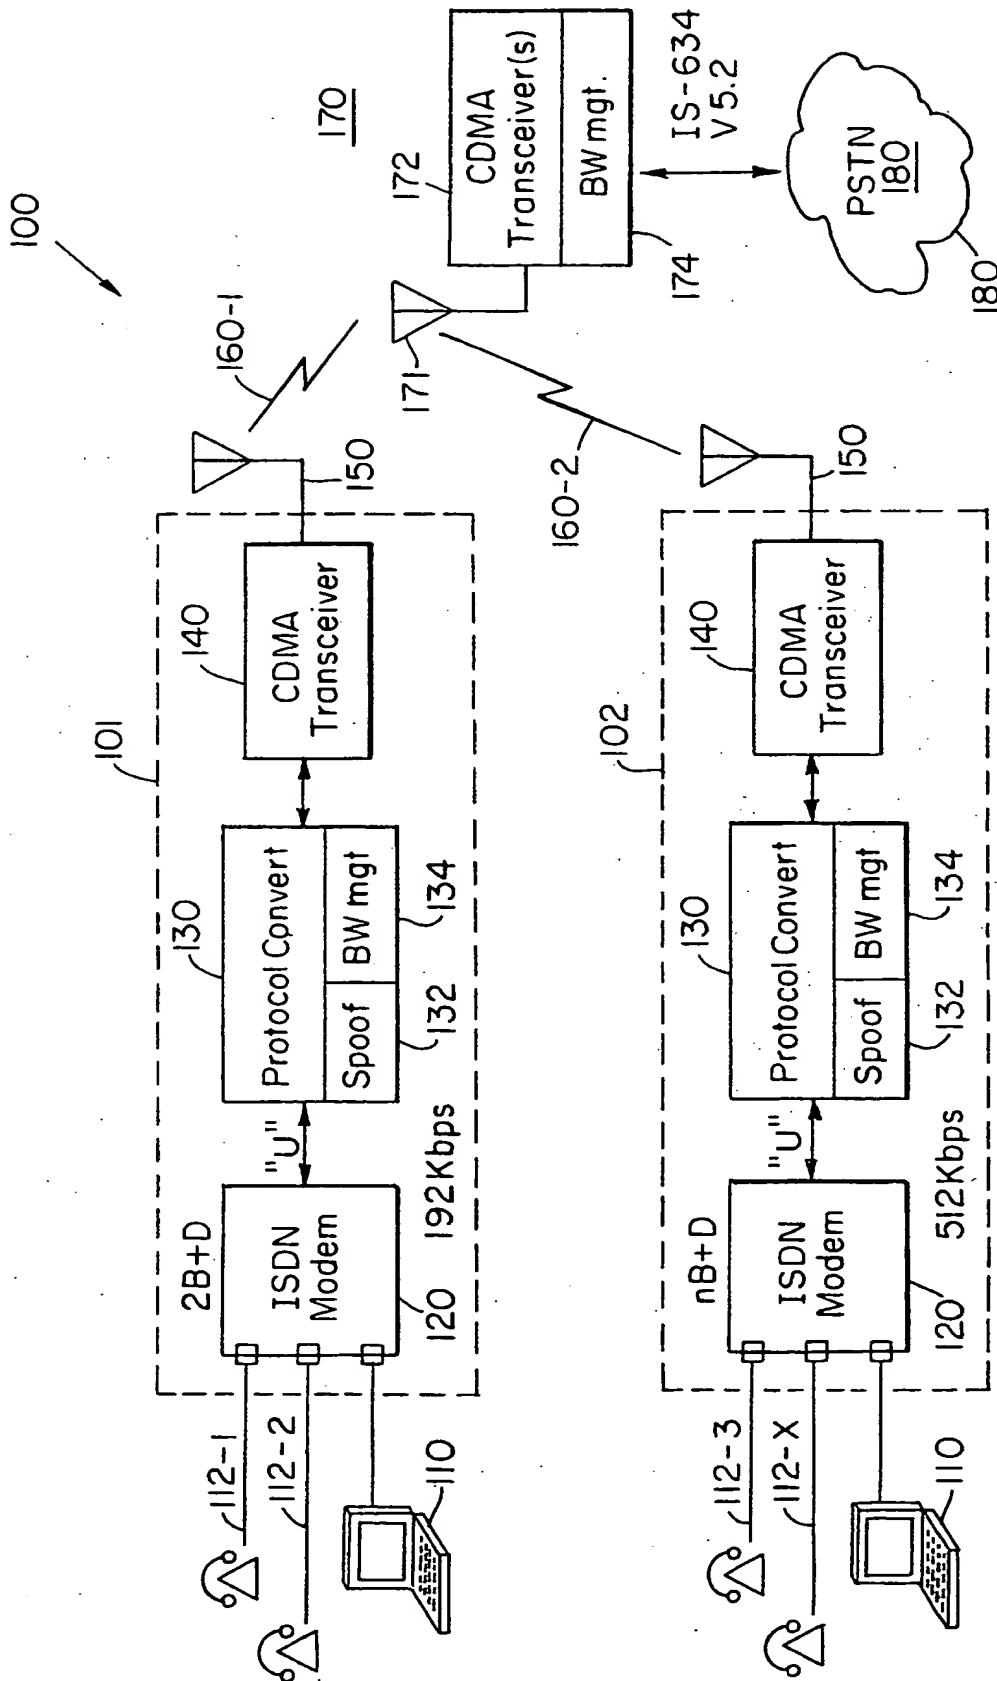


FIG. 1

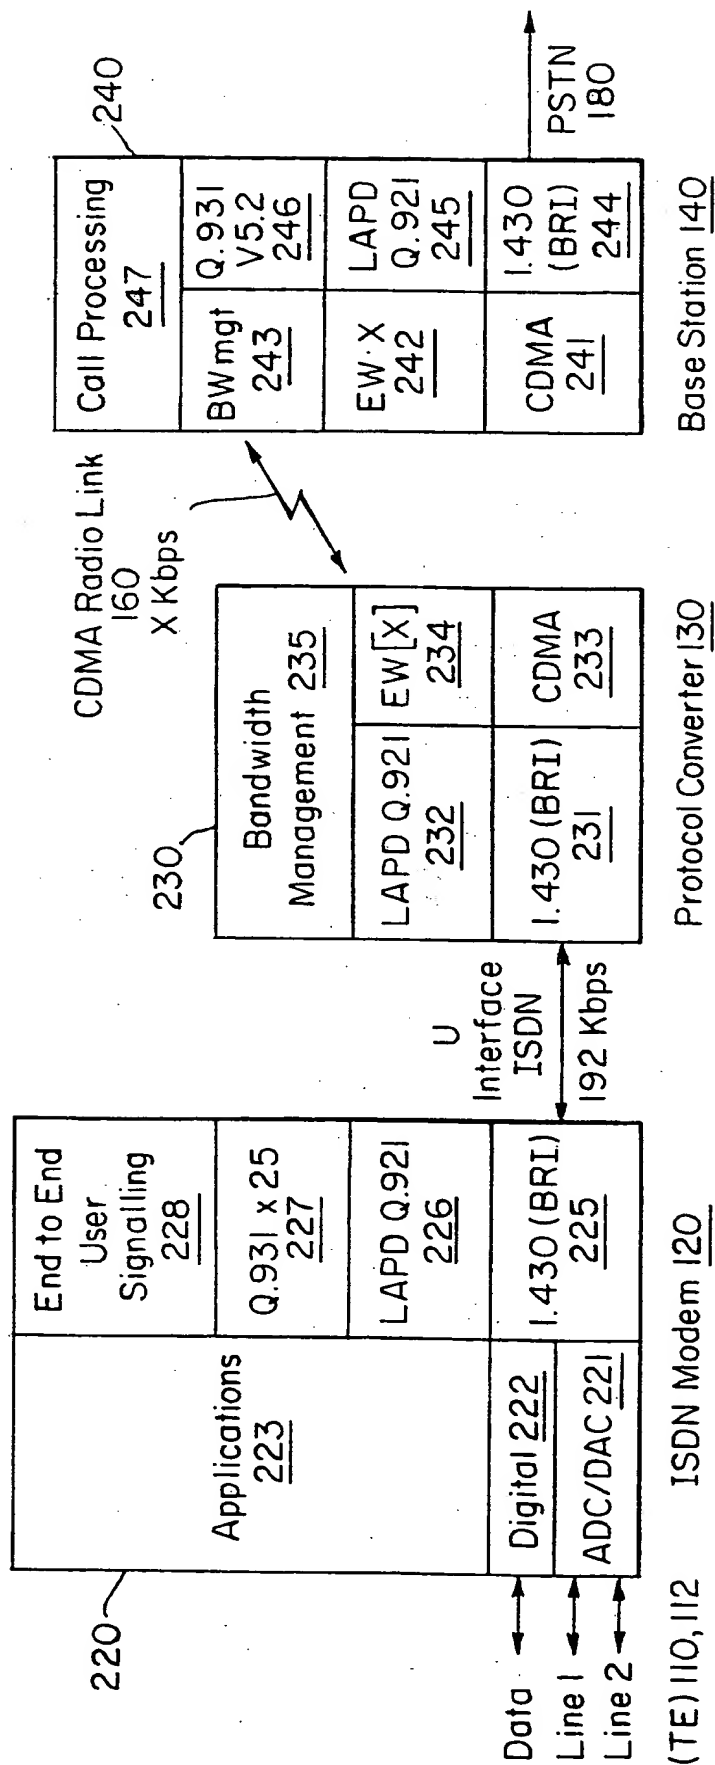


FIG. 2

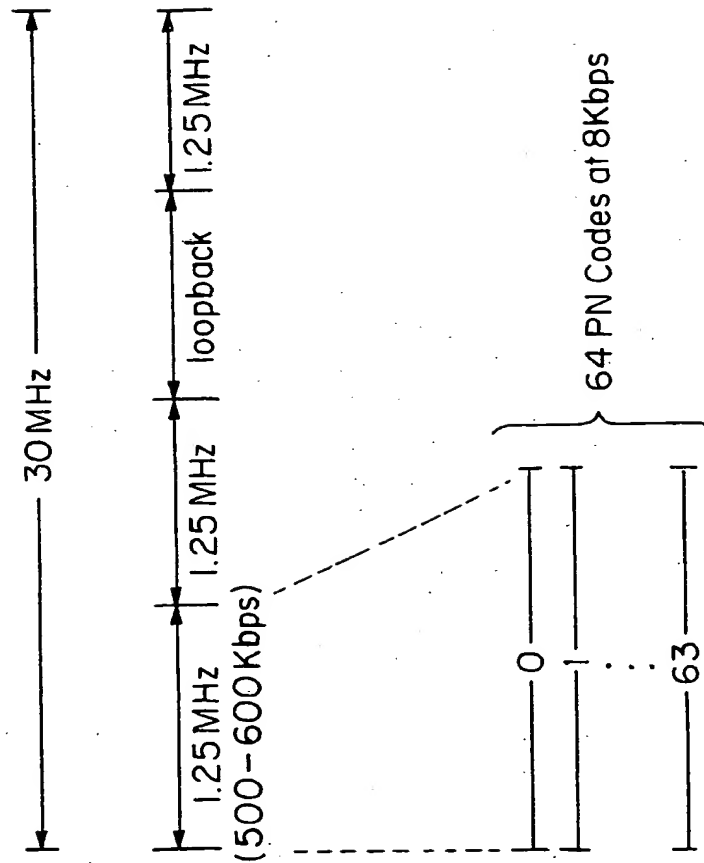


FIG. 3

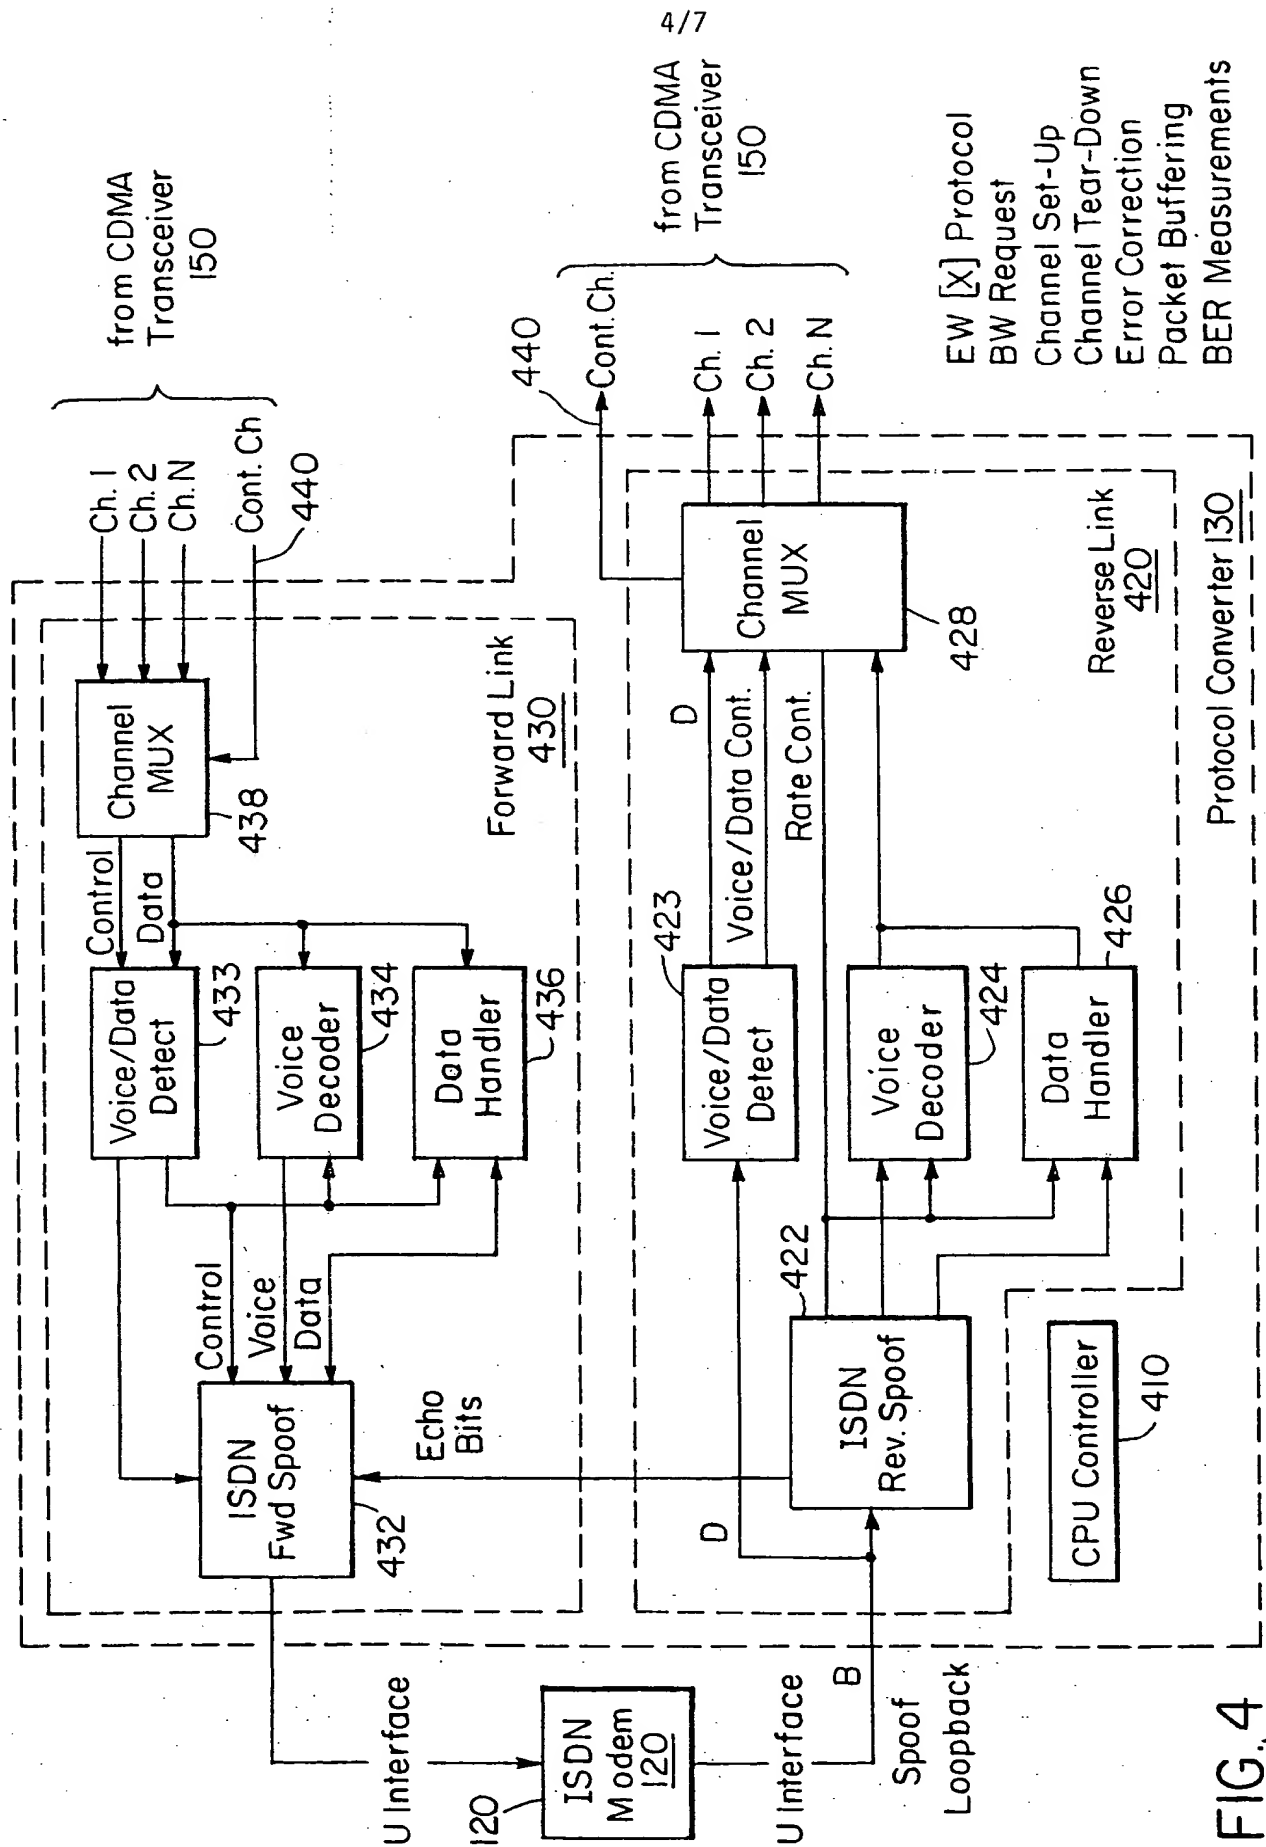


FIG. 4

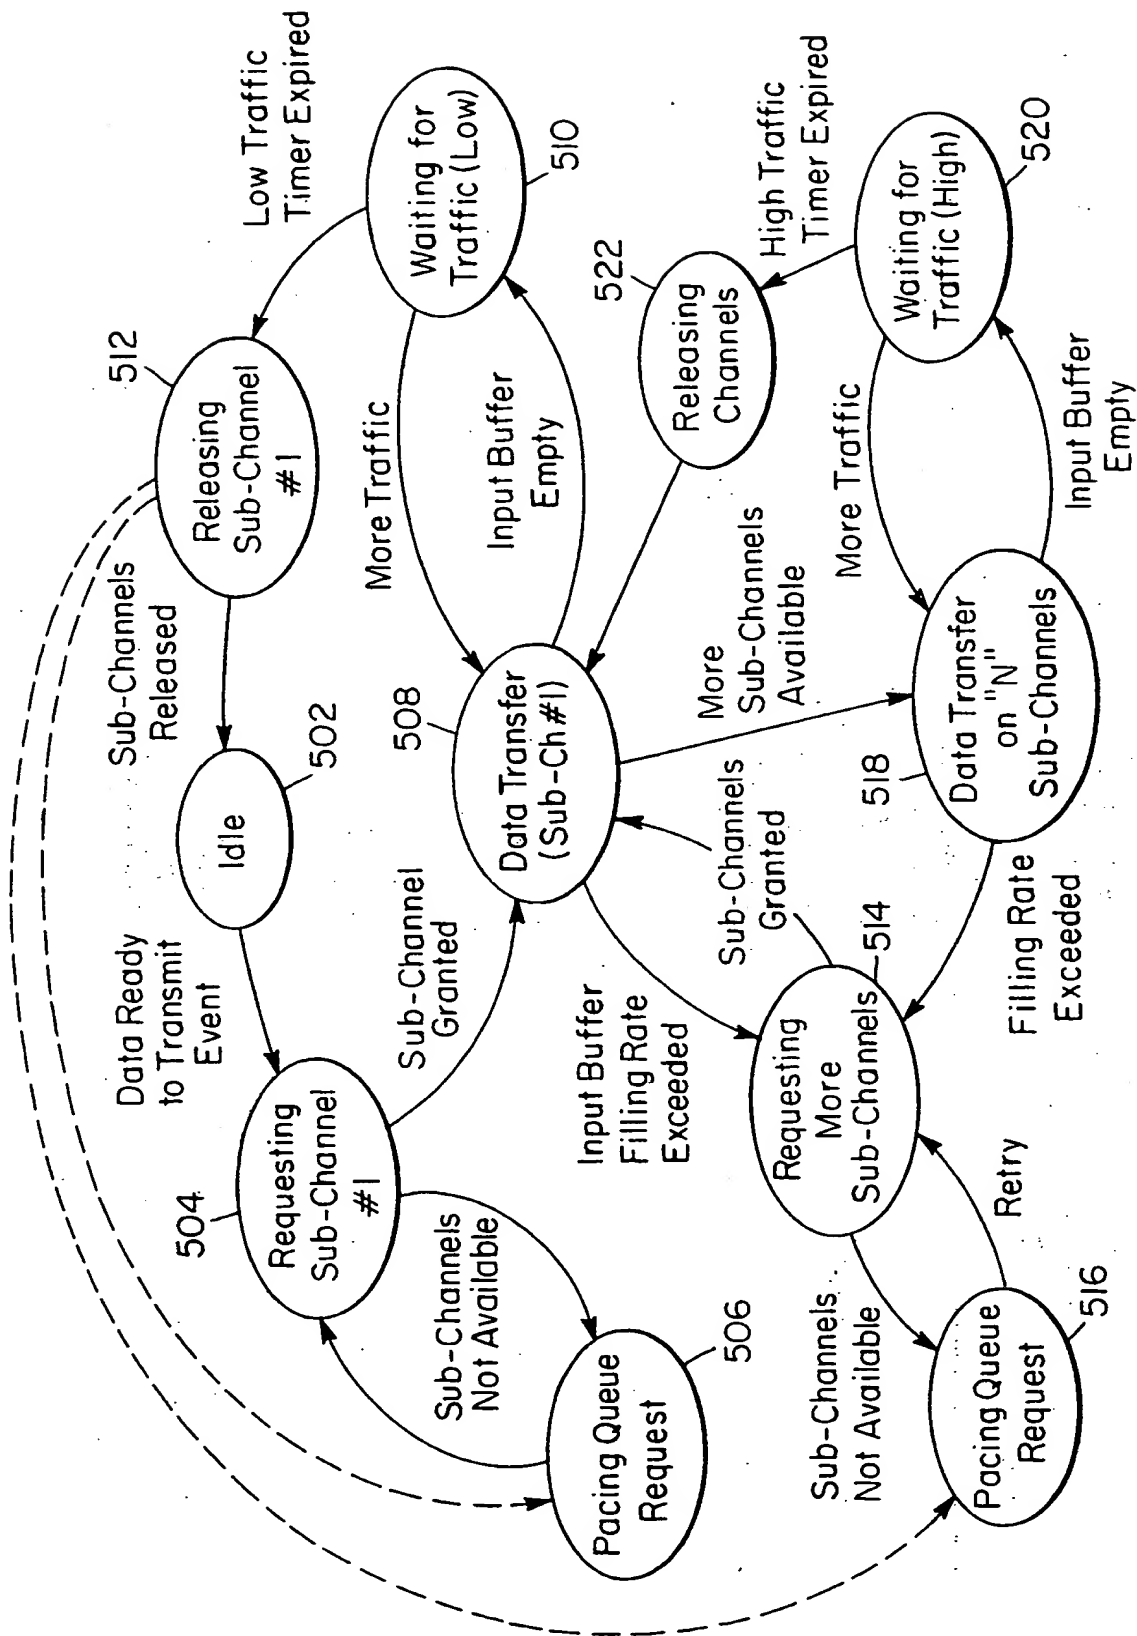


FIG. 5

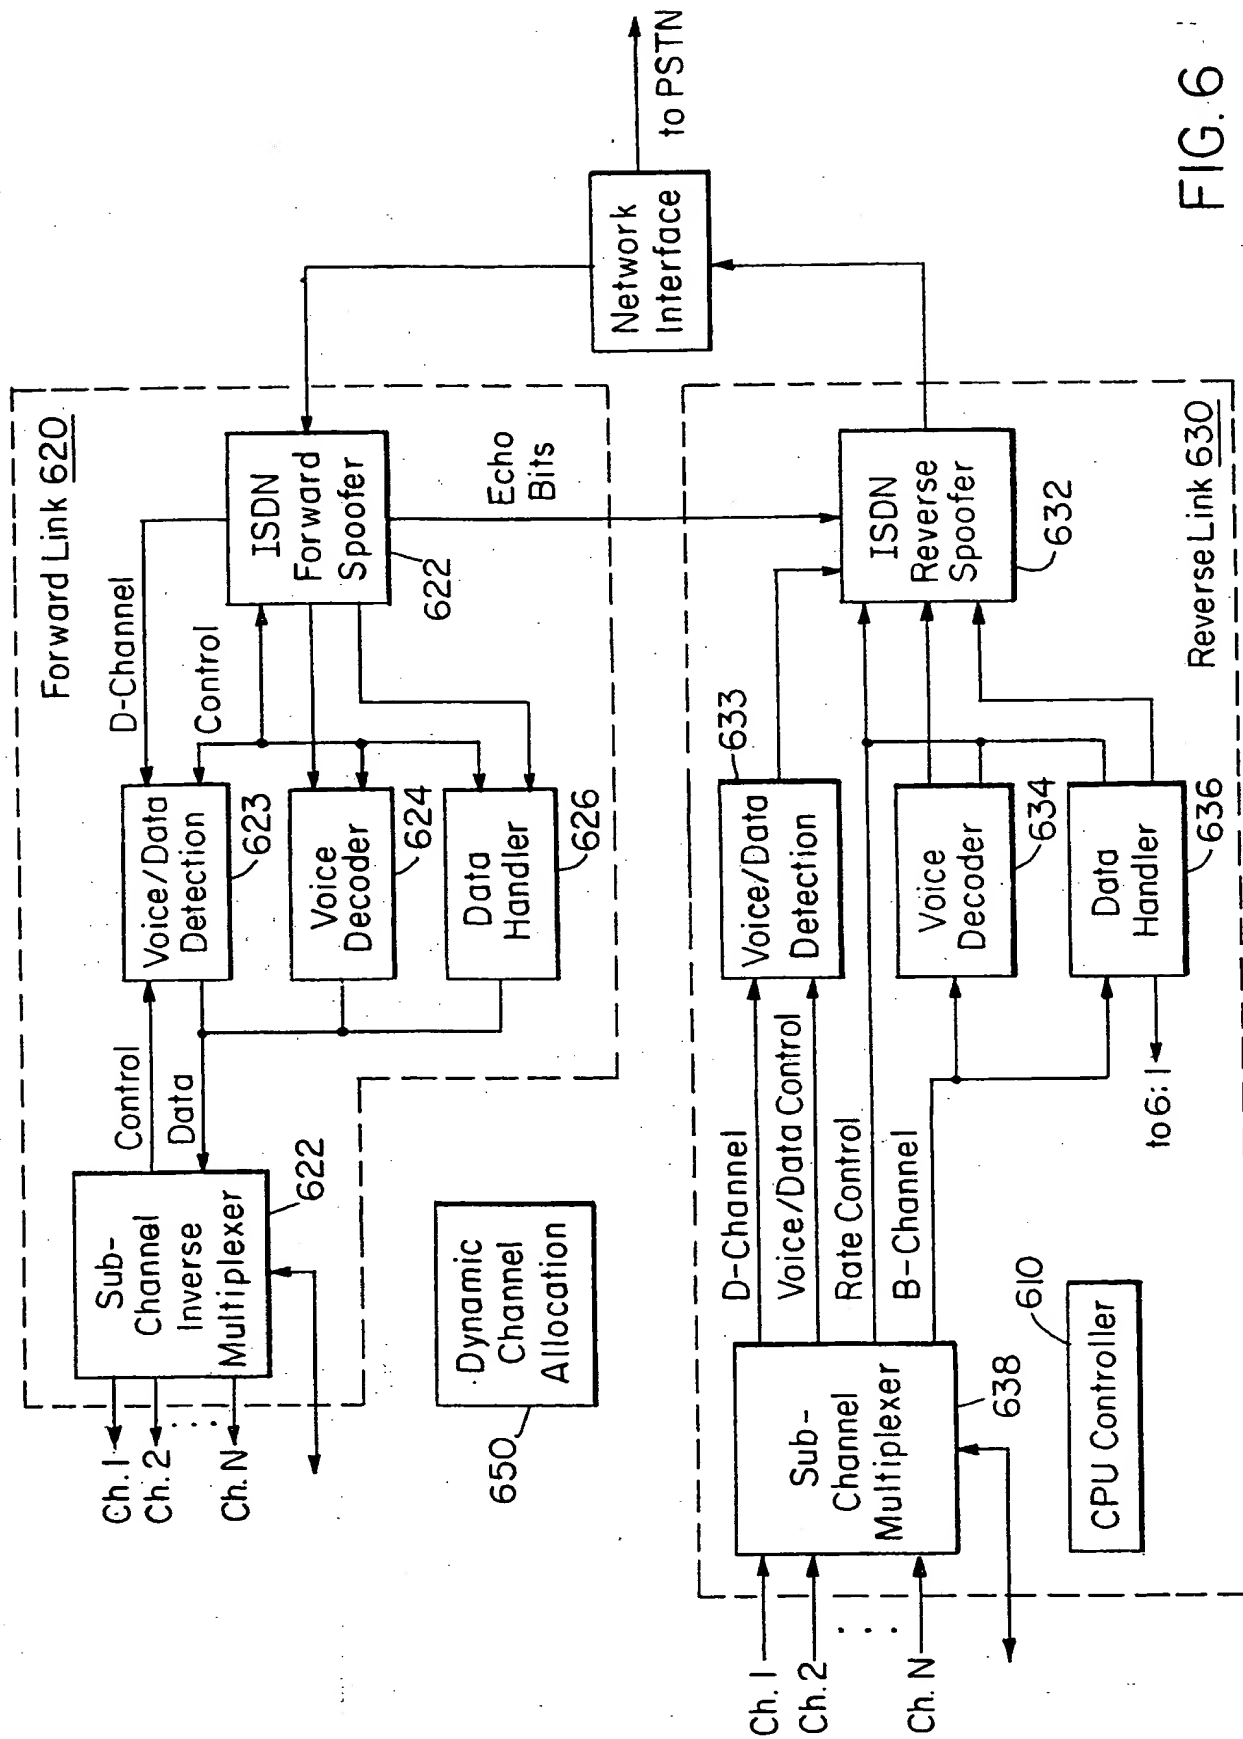


FIG. 6

7/7

## MAIN:

DO Always  
    Process Port Request  
    Process Bandwidth Release  
    Process Bandwidth Requests  
    Locate and tear down unused sub-channels  
ENDDO

} 710

## PORT REQUEST:

Make reservation in least utilized sub-band  
    Reservation decision based on % of available Sub-Channels to  
    assign (Based on parallel user BW vs. throughput efficiency)  
IF reservation was made  
    Send frequency and code assignment  
    Update allocations  
ELSE  
    Add port request to port queue  
    Calculate expected wait time  
    Send wait message to user  
ENDIF

} 720

## BANDWIDTH RELEASE:

Notify channel-bonding function  
Return frequency and code to available pool  
Update radio record

} 730

## BANDWIDTH REQUEST:

Select highest priority with lowest bandwidth utilization,  
including need-allocation gap  
Check other sub-bands for greatest available sub channels  
    (Switch sub-bands if difference in sub-band space  
    exceeds payback threshold)  
Assign sub channels based on need, priority, availability  
Notify channel bonding function  
Update radio record

} 740

FIG. 7

**THIS PAGE BLANK (USPTO)**





## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :

H04Q 7/22

A3

(11) International Publication Number:

WO 98/59523

(43) International Publication Date: 30 December 1998 (30.12.98)

(21) International Application Number: PCT/US98/12740

(22) International Filing Date: 18 June 1998 (18.06.98)

(30) Priority Data:

60/050,338	20 June 1997 (20.06.97)	US
60/050,277	20 June 1997 (20.06.97)	US
08/992,760	17 December 1997 (17.12.97)	US

(71) Applicant: TANTIVY COMMUNICATIONS, INC. [US/US];  
Suite 300, 2200 Front Street, Melbourne, FL 32901 (US).(72) Inventors: GORSUCH, Thomas, E.; 530 Franklin Avenue,  
Indialantic, FL 32903 (US). AMALFITANO, Carlo; 705  
Riverside Drive, Melbourne Beach, FL 32951 (US).(74) Agents: THIBODEAU, David, J., Jr. et al.; Hamilton, Brook,  
Smith & Reynolds, P.C., Two Militia Drive, Lexington, MA  
02173 (AU).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(88) Date of publication of the international search report:

25 March 1999 (25.03.99)

(54) Title: DYNAMIC BANDWIDTH ALLOCATION TO TRANSMIT A WIRELESS PROTOCOL ACROSS A CODE DIVISION MULTIPLE ACCESS (CDMA) RADIO LINK

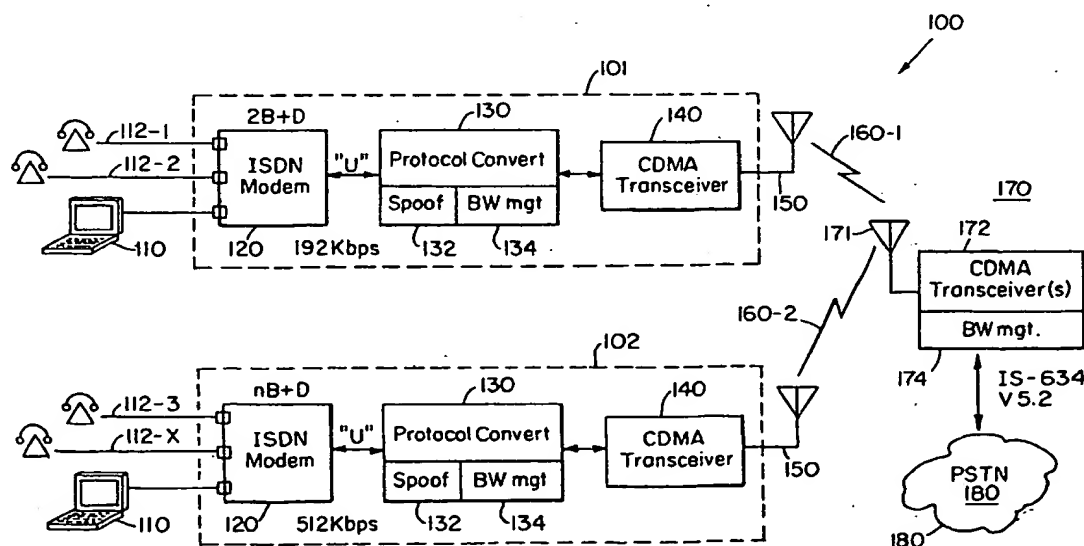

## (57) Abstract

A technique for transmission of wireless signals across CDMA radio links. Bandwidth is allocated dynamically within a session to specific CDMA subscriber unit based upon data rate determinations. Specifically, a dynamic bandwidth allocation algorithm operates from limits calculated based upon available ports per subscriber, expected user bandwidth, and parallel user bandwidth versus throughput. Provisions for priority service, unbalanced forward and reverse spectrum utilization, voice prioritization, and band switching are also made.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

# INTERNATIONAL SEARCH REPORT

National Application No

PCT/US 98/12740

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H0407/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 682 423 A (AT & T CORP) 15 November 1995 see column 1, line 43 - line 57 see column 5, line 53 - column 8, line 1 see column 9, line 5 - line 11 see figure 5 ---	1-5, 7, 8, 10, 11
X	EP 0 719 062 A (AT & T CORP) 26 June 1996  see column 1, line 39 - column 2, line 35 see column 3, line 48 - line 54 see column 4, line 31 - line 53 see column 5, line 10 - line 15 see column 8, line 37 - column 10, line 5 see claims 1-8 --- -/--	1, 4, 5, 7, 8, 10, 11

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 December 1998

Date of mailing of the international search report

17/12/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

CASALS CASTANE, J

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/12740

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 37081 A (ROKE MANOR RESEARCH ;DAVIS SIMON PAUL (GB)) 21 November 1996 see page 4, line 9 - page 7, line 12 see page 10, line 2 - line 5 ---	1,2,8
X	WO 96 08934 A (ALBROW RICHARD JOHN ;BLACK SIMON ALEXANDER (GB); MARTIN PAUL MAXWE) 21 March 1996 see page 2, line 4 - page 4, line 2 see page 9, line 8 - page 10, line 10 ---	10,11
A	EP 0 526 106 A (AMERICAN TELEPHONE & TELEGRAPH) 3 February 1993 see column 5, line 28 - column 9, line 23 -----	9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/12740

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0682423 A	15-11-1995	US 5442625 A CA 2145708 A JP 8065273 A	15-08-1995 14-11-1995 08-03-1996
EP 0719062 A	26-06-1996	US 5592470 A JP 8280058 A	07-01-1997 22-10-1996
WO 9637081 A	21-11-1996	CN 1157083 A EP 0771510 A JP 10503357 T	13-08-1997 07-05-1997 24-03-1998
WO 9608934 A	21-03-1996	AU 3477995 A BR 9508943 A CN 1160468 A EP 0795255 A FI 971088 A JP 10505969 T ZA 9507745 A	29-03-1996 11-11-1997 24-09-1997 17-09-1997 14-03-1997 09-06-1998 06-05-1996
EP 0526106 A	03-02-1993	US 5463623 A JP 2577168 B JP 7143179 A	31-10-1995 29-01-1997 02-06-1995






PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>H04Q 7/22</b>	<b>A3</b>	(11) International Publication Number: <b>WO 98/59523</b> (43) International Publication Date: 30 December 1998 (30.12.98)
(21) International Application Number: PCT/US98/12740 (22) International Filing Date: 18 June 1998 (18.06.98)  (30) Priority Data: 60/050,338 20 June 1997 (20.06.97) US 60/050,277 20 June 1997 (20.06.97) US 08/992,760 17 December 1997 (17.12.97) US  (71) Applicant: TANTIVY COMMUNICATIONS, INC. [US/US]; Suite 300, 2200 Front Street, Melbourne, FL 32901 (US).  (72) Inventors: GORSUCH, Thomas, E.; 530 Franklin Avenue, Indialantic, FL 32903 (US). AMALFITANO, Carlo; 705 Riverside Drive, Melbourne Beach, FL 32951 (US).  (74) Agents: THIBODEAU, David, J., Jr. et al.; Hamilton, Brook, Smith & Reynolds, P.C., Two Militia Drive, Lexington, MA 02421-4799 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report.  (88) Date of publication of the international search report: 25 March 1999 (25.03.99)

(54) Title: DYNAMIC BANDWIDTH ALLOCATION TO TRANSMIT A WIRELESS PROTOCOL ACROSS A CODE DIVISION MULTIPLE ACCESS (CDMA) RADIO LINK

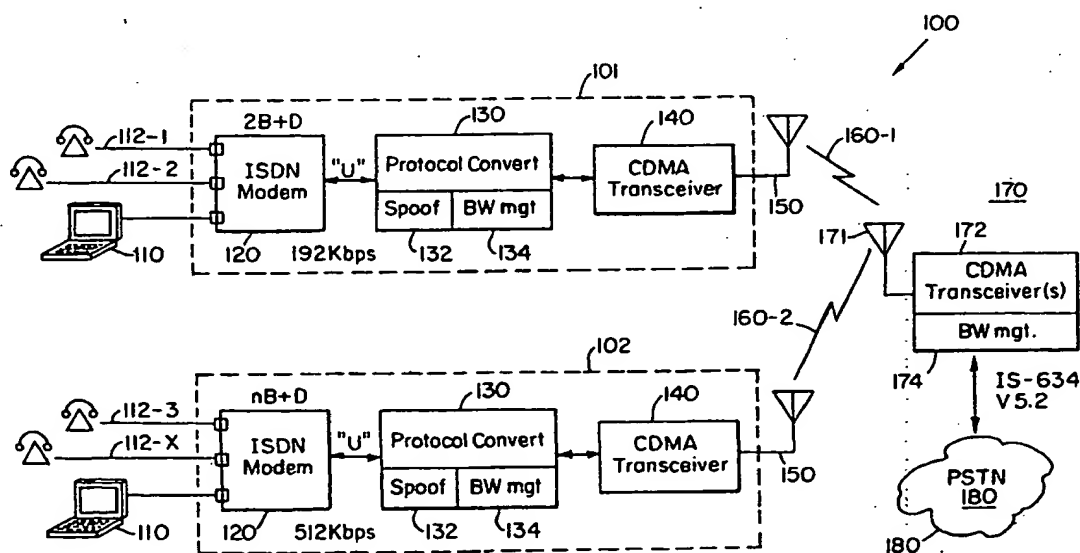

## (57) Abstract

A technique for transmission of wireless signals across CDMA radio links. Bandwidth is allocated dynamically within a session to specific CDMA subscriber unit based upon data rate determinations. Specifically, a dynamic bandwidth allocation algorithm operates from limits calculated based upon available ports per subscriber, expected user bandwidth, and parallel user bandwidth versus throughput. Provisions for priority service, unbalanced forward and reverse spectrum utilization, voice prioritization, and band switching are also made.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**



---

**THIS PAGE BLANK (USPTO)**